

3 1/2位數可程式盤面型數位電錶 (24X48mm)

(3 1/2 DIGITAL PANEL METER OF PROGRAMMABLE)(24X48mm)

MODEL
MMS-L



特點(FEATURES)

精確度0.1%滿刻度 ± 1位數(Accuracy 0.1% F.S. ± 1digit)
 可量測交直流電流/交直流電壓/電位計/傳送器/Pt-100/荷重元/電阻 等信號
 (Measuring DCA/DCV/ACA/ACV/Potentiometer/Transmitter/Pt-100/Load Cell/Resistor/etc.....)
 顯示範圍0-1999可任意規劃(Programmable rate 0 to 1999 digit)
 小數點可任意規劃(Decimal point can be modified)
 尺寸小,穩定性高(Dimension small and High stability)

1.MODEL:MMS-L

(選購型號)


NO	Input Type	NO	CV(ACV)	NO	DCA(ACA)	NO	Potentiometer	NO	Transmitter	NO	Pt-100	NO	Load Cell	NO	Aux.power
A	DC	11	0~50mV	21	0~19.99uA	31	0~10%	41	DC4~20mA	51	-50.0~+50.0	61	2mV/V	A	DC5V(Non-isolating)
B	AC(RMS)	12	0~5V	22	0~199.9uA	32	0~50%	42	DC1~5V	52	-100.0~+100.0	62	3mV/V	B	DC5V(Isolating)
D	Potentiometer	13	0~10V	23	0~1.999mA	33	0~100%	49	SPECIFIED	53	-199.9~+199.9	69	SPECIFIED	C	DC10~30V(Non-isolating)
E	Transmitter	14	0~36V	24	0~19.99mA	34	5~95%			59	SPECIFIED			D	DC10~30V(Isolating)
F	Pt-100(RTD)	15	0~54V	25	0~199.9mA	39	SPECIFIED				Three wire connection non-programmable		Exciting DC5V(<25mA)		Less ± 10% for input Less 1VA for input
H	Load Cell	16	0~110V	26	0~1.999A										
R	Resistor	17	0~600V	27	0~5.00A										
O	SPECIFIED	19	SPECIFIED	29	SPECIFIED										

2.SPECIFICATION (主要規格)

Measuring accuracy : 0.1% F.S. ± 1 digit
 (精確度) (23 ± 5) : 0.2% F.S. ± 1 digit(AC)
 Sampling time : 2.5 cycles/sec.
 (取樣時間)
 Readout range : 0- ± 1999 digit adjustable
 (顯示值範圍)
 Zero (offset) range : 0- ± 100 digit adjustable
 (歸零調整範圍)
 Over input indication : " 1 " or " -1 "
 (過載顯示)
 Display : Red high efficiency LEDs high 10.16mm(0.4")
 (顯示幕)
 Polarity display : When input is negative " _ " display
 (極性顯示)
 Temp. coefficient : 50ppm/ (0-50)
 (溫度係數)
 Dielectric strength : 1KVac/1 min. (input/power)
 (絕緣耐壓能力)
 Operating condition : 0-50 (20 to 90% RH non-condensed)
 (使用環境條件)
 Storage condition : 0-70 (20 to 90% RH non-condensed)
 (存放環境條件)
 CE EMC Certification : EN 55022:1998/A1:2000 Class A
 EN 61000-3-2:2000
 EN 61000-3-3:1995/A1:2001
 EN 55024:1998/A1:2001

3.Program of span and zero and decimal point set

(顯示值之小數點設定與歸零值與最大值校正位置圖)

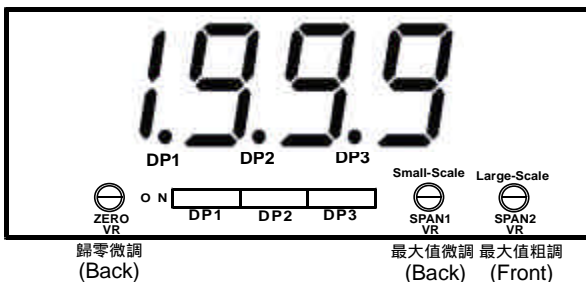

4.OUTSIDE DIMENSION AND CONNECTION DIAGRAM

(外型尺寸與開孔尺寸與配線圖)

