


32A 4-pole up to 690 V
32A 5-pole up to 415 V

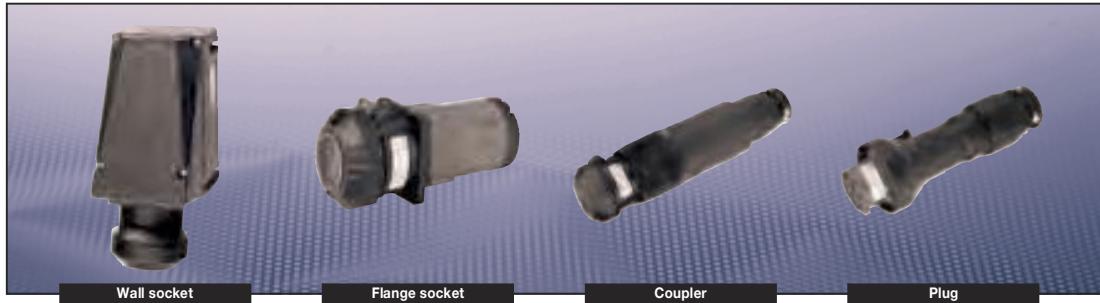

Technical data

Ex-plugs and receptacles accd. to IEC 60309-1/2

Marking to 94/9/EC	Ex II 2 G Ex de (ia) IIC T6 / Ex II 2 D Ex tD A21 IP66 T60 °C
EC-Type Examination Certificate	Wall socket, plug and coupler: PTB 99 ATEX 1041 Flange socket: PTB 99 ATEX 1042 U
IECEx certification of conformity	IECEx BKI 04.0006
IECEx type of protection	Ex ed [ia] IIC T6/T5
Permissible ambient temperature	-20 °C to +40 °C ¹⁾
Rated voltage	up to 750 V (AC)
Rated current	32 A
Frequency	up to 400 Hz
Rated making/rated breaking capacity AC-3	
accd. EN 60947-3	U _e 690 V / I _e 32 A
External back-up fuse	without therm. protection: 35 A with therm. protection: 50 A gL (rated current 32 A set to
Insulation class	I
Degree of protection accd. EN 60529	IP66
Enclosure colour	black

Wall socket

Cable glands/enclosure drilling	1 x M40 Ø 17 - 28 mm, 1 x M40 Ex-screw plug plastic or 2 x M32 metal thread with 2 Ex-screw plug plastic
Connecting terminals	2 x 4 - 10 mm ²
Enclosure material	Glass-fibre reinforced polyester

Plug

Cabel glands	Ø 17 - 28 mm
Connecting terminals	1.0 - 6 mm ²
Enclosure material	Polyamide

Coupler


Cabel glands	Ø 17 - 28 mm
Connecting terminals	2 x 4 - 10 mm ²
Enclosure material	Polyamide

Flange socket

Connecting terminals	2 x 4 - 10 mm ²
Enclosure material	Polyamide

¹⁾ extended temperature range on request

32A 4-pole up to 690 V
32A 5-pole up to 415 V

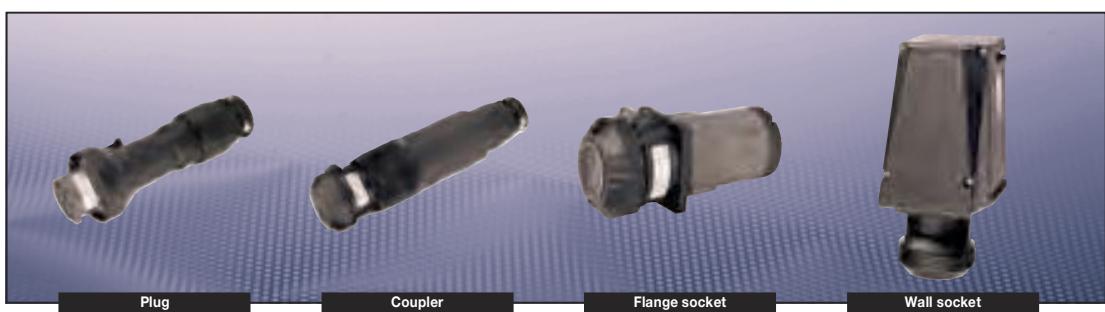

Ordering details

Voltage	h	Type	Auxiliary contact	Cable entries	Weight approx.	Order No.
Type 32 A 4-pole						
200-250 V	9	Wall socket	–	KU	1.8 kg	GHG 512 4409 R0001
		Wall socket	–	ME	1.9 kg	GHG 512 4409 R3001
		Flange socket			1.0 kg	GHG 512 8409 R0001
		Coupler			1.7 kg	GHG 512 3409 R0001
		Plug			0.7 kg	GHG 512 7409 R0001
380-415 V	6	Wall socket	–	KU	1.8 kg	GHG 512 4406 R0001
		Wall socket	–	ME	1.9 kg	GHG 512 4406 R3001
		Wall socket	yes	KH	1.8 kg	GHG 512 4406 R0501
		Flange socket			1.0 kg	GHG 512 8406 R0001
		Coupler			1.7 kg	GHG 512 3406 R0001
		Plug			0.7 kg	GHG 512 7406 R0001
480-500 V	7	Wall socket	–	KU	1.8 kg	GHG 512 4407 R0001
		Wall socket	–	ME	1.9 kg	GHG 512 4407 R3001
		Wall socket	yes	KH	1.8 kg	GHG 512 4407 R0501
		Flange socket			1.0 kg	GHG 512 8407 R0001
		Coupler			1.7 kg	GHG 512 3407 R0001
		Plug			0.7 kg	GHG 512 7407 R0001
600-690 V	5	Wall socket	–	KU	1.8 kg	GHG 512 4405 R0001
		Wall socket	–	ME	1.9 kg	GHG 512 4405 R3001
		Wall socket	yes	KH	1.8 kg	GHG 512 4405 R0501
		Flange socket			1.0 kg	GHG 512 8405 R0001
		Coupler			1.7 kg	GHG 512 3405 R0001
		Plug			0.7 kg	GHG 512 7405 R0001
Type 32 A 5-pole						
200-250 V		Wall socket	–	KU	1.8 kg	GHG 512 4506 R0001
380-415 V	6	Wall socket	–	ME	1.9 kg	GHG 512 4506 R3001
		Wall socket	yes	KH	1.8 kg	GHG 512 4506 R0501
		Flange socket			1.0 kg	GHG 512 8506 R0001
		Coupler			1.7 kg	GHG 512 3506 R0001
		Plug			0.7 kg	GHG 512 7506 R0001

Other voltage ranges and versions available on request.

KU = 1 x plastic cable glands M40 for Ø 17-28 mm, 1 x M40 Ex-screw plug plastic

KH = 1 x plastic cable glands M40 for Ø 16-28 mm,

1 x plastic cable glands M25 for Ø 8 - 17 mm, with auxiliary contact

ME = 2 x metal thread M32 with Ex-screw plug plastic