


# KBJ8A Thru KBJ8M

**High Current Glass Passivated Molding Single-Phase Bridge Rectifier**

**Reverse Voltage 100 to 1000V Forward Current 8.0A**

## FEATURES

- Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- High current capacity with small package
- Glass passivated chip junctions
- Superior thermal conductivity
- High IFSM



## 1. Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	Symbol	KBJ8A	KBJ8D	KBJ8G	KBJ8J	KBJ8K	KBJ8M	Unit
Maximum repetitive voltage	VRRM	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	100	200	400	600	800	1000	V
Maximum DC reverse current TA=25 °C at rated DC blocking voltage TA=125°C	IR				10			µA
Maximum average forward rectified output current at	Io	With heatsink Tc=100°C <sup>(1)</sup> Without heatsink Ta=25°C <sup>(2)</sup>			500			
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load					8			A
Rating of fusing (t<8.3ms)	I <sup>2</sup> t				2.8			A
Dielectric strength terminals to case, AC 1 minute Current 1mA	Vdia				175			A <sup>2</sup> sec
Max instantaneous forward voltage at 4.0A	VF				1.05			V
Operating junction temperature	TJ				-55~150			°C
Maximum thermal on P.C.B. without heat-sink	R <sub>θJA</sub>				22			°C/W
resistance per leg on Al plate heat-sink	R <sub>θJC</sub>				2.8			
Storage temperature	Tstg				-55~150			°C
Mounting torque	Tor				Rating Torque : 0.8			N.m

Notes:

(1) Unit case mounted on aluminum plate heatsink

(2) Units mounted on P.C.B. without heatsink

# KBJ8A Thru KBJ8M

## 2. Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 Derating Curve

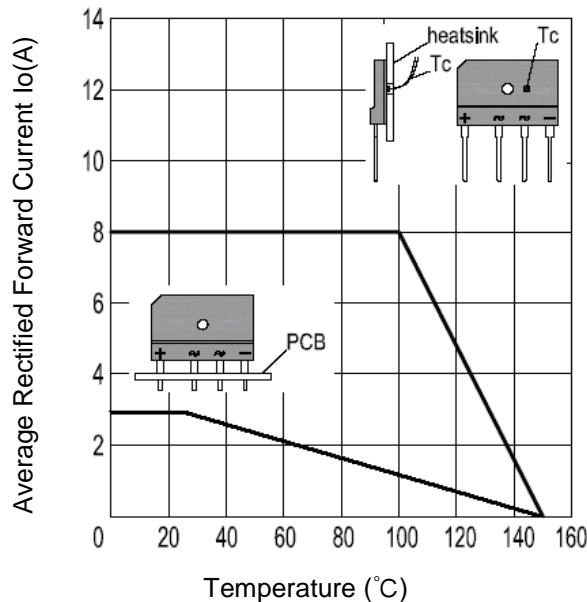


Fig.2 Typical Reverse Characteristics

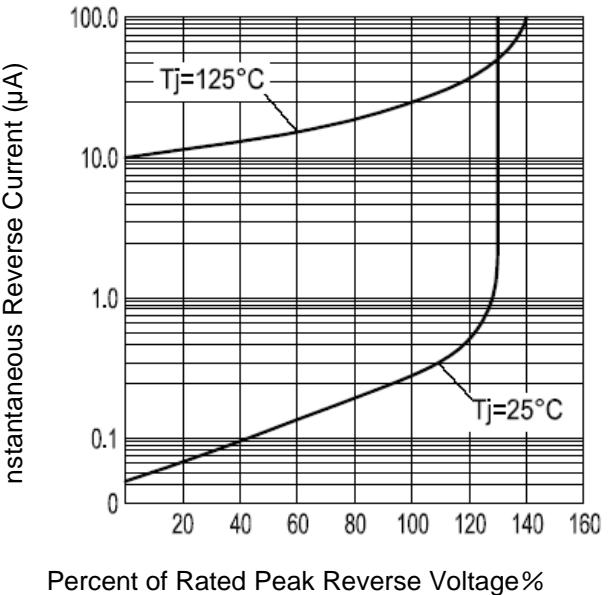


Fig.3 Forward Voltage



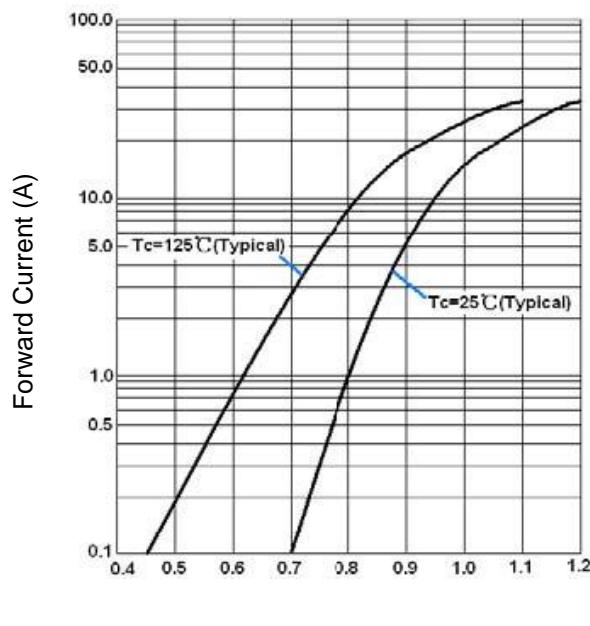


Fig.4 Peak Surge Forward Capability

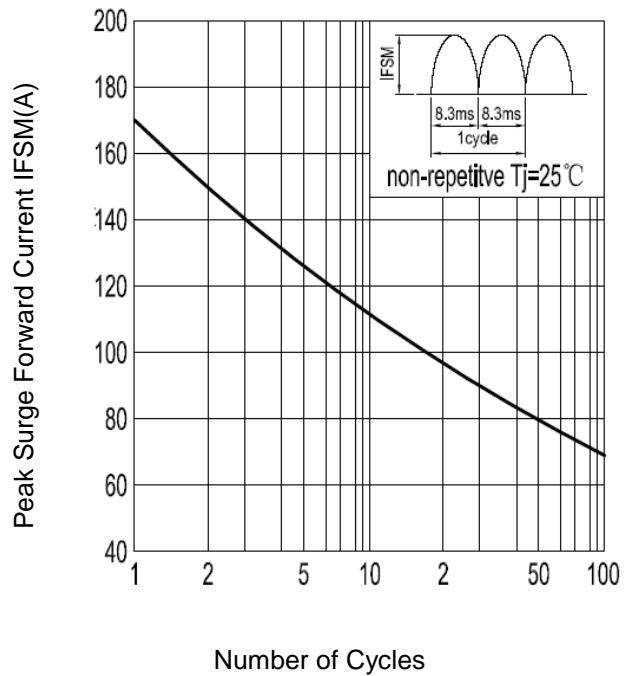

# KBJ8A Thru KBJ8M

### 3. Marking Identification

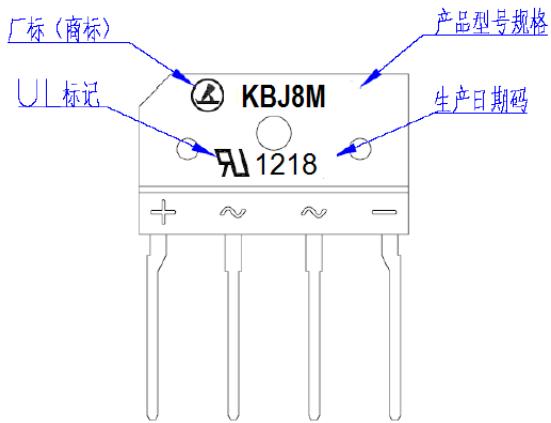


#### Note:

生产日期码包含4位数字，例如“1218”，前两个数字“12”表示为2012年，另外两个数字“18”是指第18周，即表示该产品为2012年18周生产。

型号： **KBJ 8 M**

bridge reverse voltage=1000V  
average rectified forward Current=8A  
mean: KBJ series bridge

### 4. Dimension

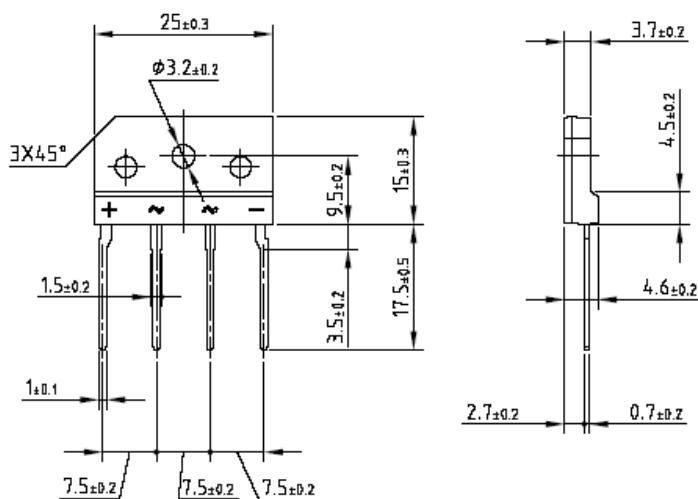

# KBJ8A Thru KBJ8M

## 5. Update Record

版次	更新记录	更新作者	更新日期
1	第一版	余佳	2012-9-14