

Tuesday, January 22, 2021

產品質量合格證明書

進行分析驗測, 符合該 OMEGA 和 MAGNA 之產品的技術規格.

產品型號


批號

包裝

O022F
O051A
O057A

O058C
O058E
O073A
O073C
O077A
O077C

O077I
O085A
O085C
O095A
O608D
O612E
O646I
O690I
O690I

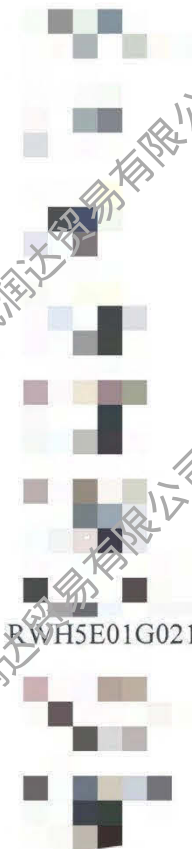

RWH5E01G021R

15-KG
15-KG
15-KG
15-KG
15-KG
15-KG
400-GM
15-KG
15-KG
400-GM
15-KG
400-GM
400-GM
400-GM
400-GM
400-GM
15-KG
15-KG
400-GM
15-KG
20-LTR
20-LTR
20-LTRE
20-LTR
20-LTR
20-LTR

谷祖保

谷祖保
技術部經理

TYPICAL DATA:

TEST	ASTM TEST METHOD	TEST RESULT
Base Oil		
Viscosity, cSt at 40°C	D-445	221
Flash Point, °C	D-92	249
Pour Point, °C	D-97	-9
Dropping Point, °C	D-2265	318
Worked Penetration	D-217	
60 strokes		282
Worked 100,000 strokes, % change		5
Worked 10,000 strokes, with 50/50 water, % change		8.0
Timken OK Load, Lbs	D-2509	60
Four Ball, EP		
Weld Point, Kg	D-2596	500
Load Wear Index (LWI)	D-2596	65
Four Ball Wear, mm	D-2266	0.39
Rust Prevention Rating	D-1743	1
Water Washout @ 175°F (79.4°C), %	D-1264	1.0
Salt Fog Corrosion, 3 mil d.f.t., hours	B-117	>300
Resistance to Water Spray, % retained	D-4049	80
Wheel Bearing Leakage, gm	D-1263	0.5
Roll Stability, % Change	D-1831	5
Oil Separation, Wt. %	D-1742	0.2
NLGI Grade	-	#2
Operating Temperature Range, °C	-	-23 to 200
Color	-	Tan