



SITOR FUSE-LINK UTILIZ. CATEGORY GR,
DIN 43620 350A , AC 690 V ,(SIZE 2)




Similar to image

Technical data:

product brand name		SETRON
Current / for AC / rated value	A	350
Operating class of the fuse link		gR
Size of the fallback-system / acc. to DIN EN 60269-1		NH2
Supply voltage		
• for AC / rated value	V	690
• for DC	V	250
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	100
Design of the fuse link		SITOR, LV HRC design
Design of an identification indicator		others
mounting position		Any, preferably vertical
Climatic class		-20 to +50 at 95% relative humidity
Ambient temperature	°C	-20 ... +50
Varying load factor (WL)		1
Resistive loss	W	44
Active power loss / at rated value current / with AC / in warm operating state / per pole	W	44

Reference code / according to DIN EN 61346-2	F
Item designation / according to DIN EN 81346-2	F

Certificates/approvals:

General Product Approval	Declaration of Conformity
 CCC	 EG-Konf.
 GOST	
 UL	

Further information:



Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)
<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NE1331-2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WWW/view/en/3NE1331-2/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE1331-2

CAX-Online-Generator
<http://www.siemens.com/cax>

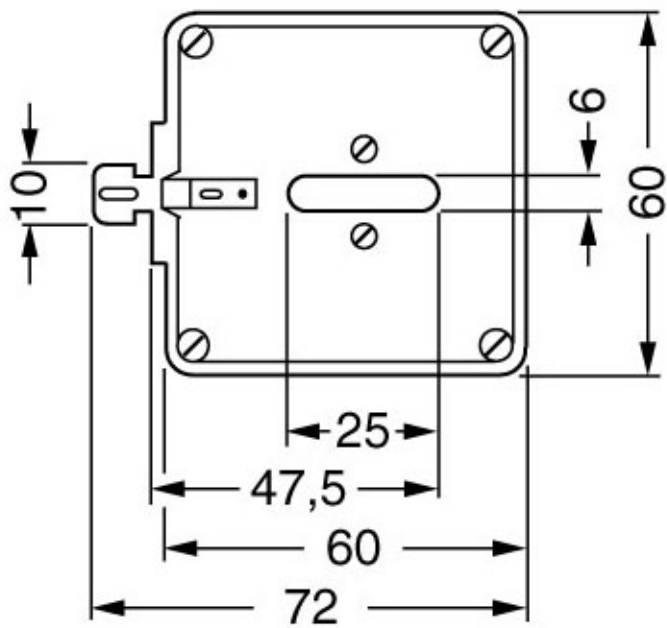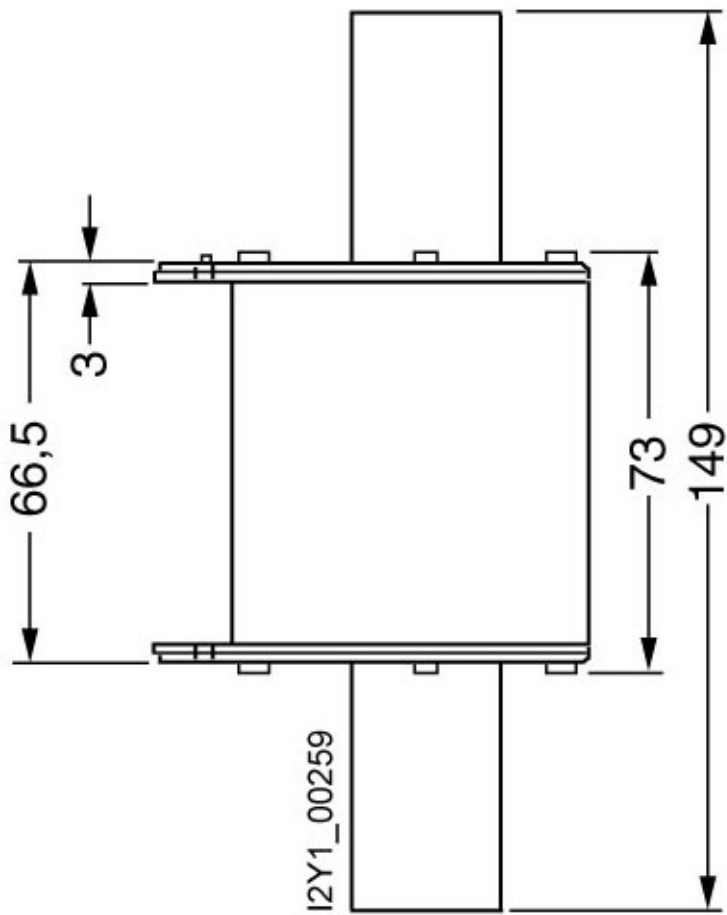

last change:

May 13, 2014